

SEALANT/PRIMER

Millennium Universal Primer



DESCRIPTION

Millennium Universal Primer is an all-purpose water-based primer designed for use with the entire Millennium family of products. The primer is easy to apply and requires no mixing. A red tint offers easy recognition of areas where the primer has been applied.

BASIC USE

Millennium Universal Primer is specially formulated for use as a film former that will enhance adhesion to most surfaces. It is approved for use over the following roof types:

- Built-up systems
- Modified Bitumen
- Metal

Millennium Universal Primer is intended to bind fine particulate matter such as dust on a gravel surfaced built-up roof or asphalt particles on a crazed or "alligatored" roof surface. **NOTE: Application of Millennium Universal Primer is not a substitute for proper removal of loose gravel or debris from the substrate by vacuuming and/or power washing.**

For additional information, contact our Technical Department.

SURFACE PREPARATION

All work surfaces should be clean, dry, and free of dirt, dust, debris, oils, loose and/or embedded gravel, un-adhered coatings, deteriorated membrane and other contaminants that may result in a surface that is not sound or is uneven.

STORAGE

Millennium Universal Primer can be stored at room temperature where it will have a shelf life of one year. Keep from freezing.

SAFETY

Prior to working with this or any adhesive product consult product label and Safety Data Sheet (SDS) for necessary health and safety precautions.

LIMITATIONS


- Millennium Universal Primer should not be applied to a wet surface, all surfaces must be dry prior to application.
- Millennium Universal Primer should not be applied to PVC roof membranes.
- Millennium Universal Primer should not be applied when material or surface temperatures are below 40°F (4°C).
- Millennium Universal Primer should not be applied over silicone base coatings.
- Roof decks exhibiting severe corrosion should be tested in accordance with ANSI/SPRI IA-1 2010 to ensure suitability for bonded recover applications.

COLOR

Red

FEATURES	BENEFIIS
One part	Easy to apply, no mixing
Water based	Soap and water clean up
Solvent free	VOC free, no flame hazards
Quick application	Applies in one coat

CAUTION: All statements and technical information in this document are based on tests or data that H.B. Fuller believes is reliable. However, H.B. Fuller does not warrant or guarantee the accuracy or completeness of this information. The user has sole knowledge and control of factors that can affect the performance of H.B. Fuller's products in the user's intended application. It is the user's responsibility to conduct tests to determine the compatibility of H.B. Fuller's product with the design, structure, and materials of the user's end product and the suitability of H.B. Fuller's product for the user's method of application and intended use. The user assumes all risk and liability arising out of such use.

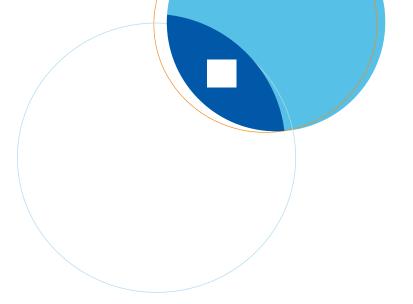

PACKAGING AND COVERAGE

Millennium Universal Primer is available in the following package:

Pail Size Part # Pails/Pallet 3.5 Gallon (13.2L) UP-3.5P-01 36

Covers 150 - 250 sq ft (14m² - 23m²) per gallon. Coverage rates my be slightly higher over irregular surfaces.

APPLICATION

- 1. All work surfaces should be clean, dry, free of dirt, dust, debris, oils, loose gravel, un-adhered coatings, deteriorated membrane and other contaminants that may result in a surface that is not
- 2. Brush, spray, or roll Millennium Universal Primer over the entire prepared surface. Applies in one coat. Allow primer to completely dry. Remove all heavy or puddled areas to ensure thorough drying. Drying time will vary based on temperature and relative humidity.
- 3. After primer has completely dried, apply Millennium Adhesives in accordance with current product application instructions.



For more information about our company, visit www.hbfuller.com/construction.



Join the Conversation | www.hbfuller.com/connect

WARRANTY: H.B. Fuller warrants its products to conform to H.B. Fuller's specifications at the time of sale when tested according to H.B. Fuller standards. If a product is proven to be defective when tested according to H.B. Fuller standards, H.B. Fuller will, at its option, refund the purchase price or replace or repair the defective product. THIS LIMITED WARRANTY IS THE BUYER'S SOLE AND EXCLUSIVE REMEDY AGAINST H.B. FULLER AND IS IN LIEU OF ANY AND ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. In no event shall H.B. Fuller be liable for any special, incidental, consequential, or punitive damages arising out of any claims whether based on negligence, contract, warranty, strict liability or otherwise