




# EV Seal 200



## Technical Data Sheet

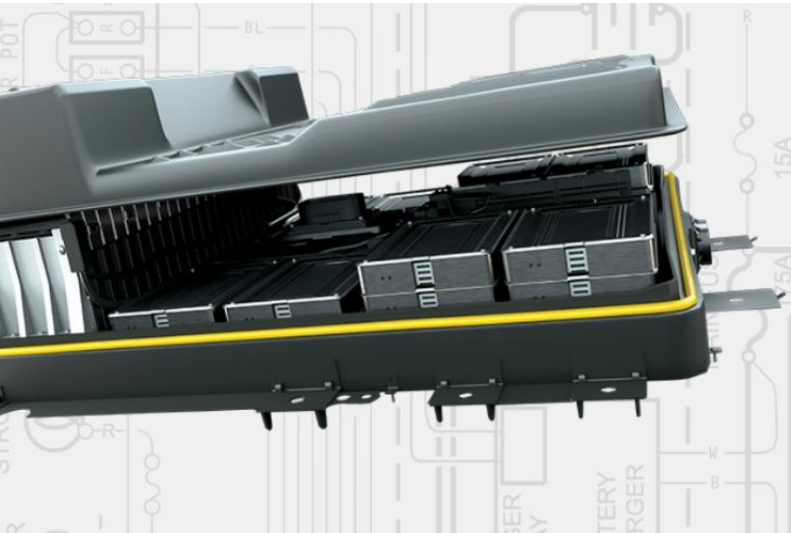

### Battery Pack Elastic sealant

EV Seal 200 is an MS polymer system that can be used as 1K moisture curing or 2K accelerated cure option. Fast skin-over and green strength at room-temperature.

The product shows superb mechanical properties and provides unparalleled levels of sealing and resistance.

Suitable for adhesion to a wide range of substrates like plastics, metals, and composite materials.

<b>Technology/Base:</b>	MS Polymer
<b>Type of Product:</b>	Elastic high strength adhesive/sealant
<b>Components:</b>	1K or 2K
<b>Curing:</b>	Moisture
<b>Appearance / Color:</b>	Black
<b>Consistency:</b>	Thixotropic



### Features and Benefits



- Excellent sealing capability against weathering, moisture, and other external influences
- Wide temperature range
- Solvent free
- Superb adhesion across wide substrate range
- High elasticity / elongation
- Fast skin formation / curing
- High chemical resistance
- Outstanding absorption of shock, vibration and CTE



**Plug into our EV Adhesive Technology**

Download our app to learn more



# EV Seal 200



## Technical Data

Physical Properties	Value	Condition/Method
Density	1.4 g/cm <sup>3</sup>	
Solid-content by weight	100%	
Glass Transition Temperature	-59 °C	DIN EN ISO 6721-1
Specific Volume Resistance	> 1 · 10 <sup>10</sup> Ω·cm	Kö-test method 100262
Processing Guidelines and Parameters		
Storage Temperature	5 °C to 25 °C	
Processing Temperature	5 °C to 35 °C	
Required Squeezing Pressure	4 bar to 5 bar	
Recommended Minimum Layer Thickness	2 mm	
Curing		
Skin Formation Time	10 min	Kö-test method 100109, Climate according to DIN 50014
Curing to Depth	3 mm/d	Within first 24 h; Climate according to DIN 50014
Change in Volume	-3%	DIN EN ISO 10563
Cured Material Characteristics		
Shore Hardness (Type A)	55	DIN ISO 7619-1, after 28 d; thickness of specimen = 6 mm
Young's Modulus at 100 % Elongation	2 MPa	DIN EN ISO 527 / DIN 53 504
Tensile Strength	3.2 MPa	DIN EN ISO 527
Elongation at Break	400%	DIN EN ISO 527
G <sub>10</sub> -Modulus	MPa	DIN EN 1465
Lap Shear Strength	3.5 MPa	DIN EN 1465, substrates: aluminum/aluminum
Tear Strength	21 N/mm	ASTM D624
Service Conditions		
Service Temperature	-60 °C to 90 °C	30 min
Short-term temperature resistance	200 °C	



### Handling and Clean-Up

Clean tools immediately after use. Once cured, the material can only be removed mechanically. Appropriate cleaners are listed in the product properties table. For further information please contact your local sales office.



### Typical Packaging

310 mL Cartridge  
600 mL Sausage  
25 kg pails  
270 kg drums



### Storage and Shelf Life

EV Seal 200 should be used within the shelf life specified on the packaging. The storage stability only applies to material stored under appropriate conditions (original unopened containers, recommended storage temperature)



### Safety and Disposal

Please read our Material Safety Data Sheet (MSDS) and the labels of each product before use. The valid safety regulations must be considered.

Please refer to the Material Safety Data Sheet (MSDS) for appropriate disposal instructions safety regulations must be considered



H.B. Fuller Company  
Kömmerling Chemische Fabrik GmbH  
Zweibrücker Straße 200  
DE-66954 Pirmasens



+49 (0)6331/56-2000



www.hbfuller.com

© H.B. Fuller Company, 2022

**IMPORTANT:** The information, specifications, procedures and recommendations provided (information) are based on our experience and we believe this to be accurate. No representation, guarantee or warranty is made as to the accuracy or completeness of the information or that use of the product will avoid losses or damages or give desired results. It is users sole responsibility to test and determine the suitability of any product for the intended use. Tests should be repeated if materials or conditions change in any way. The user is advised to review the specific context of the intended use to determine whether the users intended use violates any law or infringes upon any patent(s). No employee, distributor or agent has any right to change these facts and offer a guarantee of performance.

Unless otherwise noted, trademarks are property of H.B. Fuller Company or one of its affiliated entities.

**NOTE TO USER:** by ordering/receiving product you accept the H.B. Fuller General Terms and Conditions of Sale applicable in the region. Please request a copy if you have not received these. These Terms and Conditions contain disclaimers of implied warranties (including but not limited to disclaiming warranties of fitness for a particular purpose) and limits of liability. All other terms are rejected. In any event, (1) the total aggregate liability of H.B. Fuller for any claim or series of related claims however arising, in contract, tort (including negligence), breach of statutory duty, misrepresentation, strict liability or otherwise, is limited to replacement of affected products or refund of the purchase price for affected products. (2) H.B. Fuller shall not be liable for loss of profit, loss of margin, loss of contract, loss of business, loss of goodwill or any indirect or consequential losses arising out of or in connection with product supply. (3) Nothing in any term shall operate to exclude or limit H.B. Fullers liability for fraud, gross negligence or for death or personal injury caused by negligence, or for breach of any mandatory implied terms unless permitted by law.