


ADECOL® CQ-4444

Type of Adhesive	The ADECOL® CQ-4444 adhesive is a thermoplastic rod shape suitable for use in handgun.
Product Characteristics	The ADECOL® CQ-4444 adhesive has rapid melting at application temperature and excellent adhesion in various paper types. We suggest use in AP-1000, AP1200 or AP-2250 pistols.
Typical Applications	This adhesive was developed especially for general use in paper, cardboard, card paper and plastified materials, and can be used in the making of decorative arrangements and ornaments.
Substrates	Paper, cardboard, card paper, plastified materials and decorative arrangements and ornaments.

Typical Properties

Property	Value
Aspect	Solid and Rod-shaped
Color	White
Film	Transparent
Brookfield RVT Viscosity (sp 27/10 rpm at 170°C)	15.000 - 20.000 mPas
Softening Point °C	80,0 - 90,0
Diameter	11 – 12 mm
Length	295 – 305 mm
Shelflife	24 months

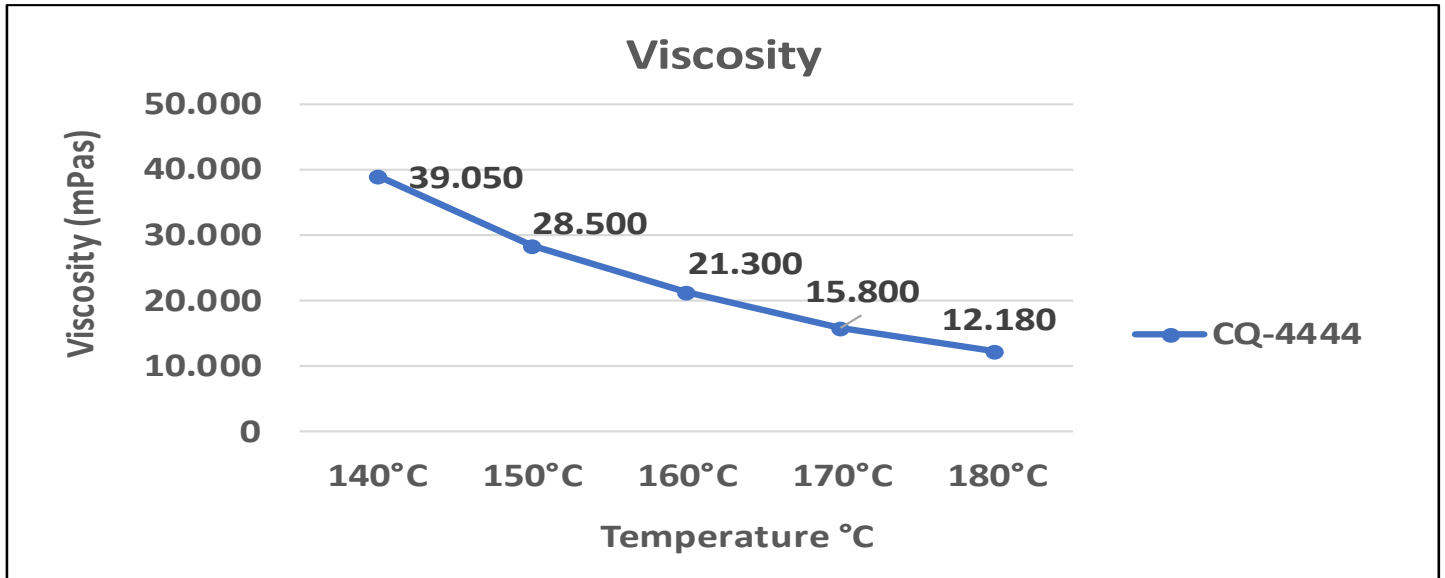

Application Instructions

Surfaces should be free dust, grease or oil, the application temperature range should be checked at each specific step according to the following factors: Characteristics of substrates, equipment, speed, quantity adhesive and ambient temperature.

Cleaning Instructions

Request information about cleaning options available to the technical department.

Typical Packaging

Request information about packaging options available to our sales department.

Storage Conditions

In the original packaging, well closed and protected from the sun, dust, humidity and high temperatures. Clean and dry place, temperature between 5°C and 35°C is advisable.

Disposal Advice

Consult the Safety Data Sheet (SDS).

Safety Advice

Consult the Safety Data Sheet (SDS).

IMPORTANT: Information, specifications, procedures and recommendations provided ("information") are based on our experience and we believe this to be accurate. No representation, guarantee or warranty is made as to the accuracy or completeness of the information or that use of the product will avoid losses or damages or give desired results. It is purchaser's sole responsibility to test and determine the suitability of any product for the intended use. Tests should be repeated if materials or conditions change in any way. No employee, distributor or agent has any right to change these facts and offer a guarantee of performance.

© and ™ are trademarks of H.B. Fuller Company ("H.B. Fuller") or one of its affiliated entities.

NOTE TO USER: *by ordering/receiving product you accept the H.B. Fuller General Terms and Conditions of Sale applicable in the region. Please request a copy if you have not received these. These Terms and Conditions contain disclaimers of implied warranties (including but not limited to disclaiming warranties of fitness for a particular purpose) and limits of liability. All other terms are rejected. In any event, (1) the total aggregate liability of H.B. Fuller for any claim or series of related claims however arising, in contract, tort (including negligence), breach of statutory duty, misrepresentation, strict liability or otherwise, is limited to replacement of affected products or refund of the purchase price for affected products. (2) H.B. Fuller shall not be liable for loss of profit, loss of margin, loss of contract, loss of business, loss of goodwill or any indirect or consequential losses arising* ©H.B. Fuller Company out of or in connection with product supply. www.hbfuller.com

