



FOAM GASKET TAPE

Eliminate Cap Sealing by Gasketing to Improve Quality




EternaBond® FGT FEATURES

- ▶ Reliable primary seal that eliminates need for cap sealing
- ▶ Proven track record in Automotive gasketing for 30+ years
- ▶ High tack adhesive allows for single person install
- ▶ 100% Solids - Zero VOC
- ▶ High grade butyl will not cold or hot flow eliminating unsightly 'oozing'



H.B. Fuller


Connecting what matters.™

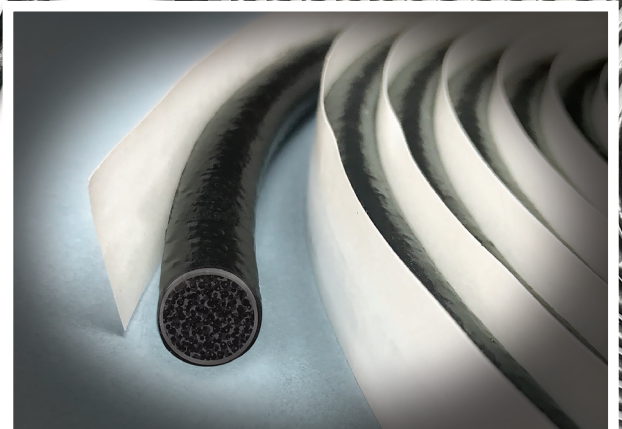



FOAM GASKET TAPE


EternaBond® FGT is a highly compressible PVC foam core encapsulated with high tack butyl adhesive/sealant. This flexible material conforms readily to corners and irregular contours. It gives a secure seal that helps protect against water penetration and prevents corrosion and moisture damage.

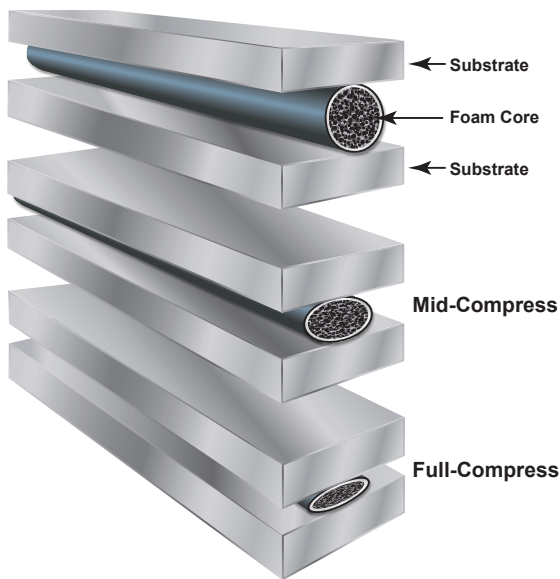

EternaBond® FGT foam core allows for outstanding flexibility to irregular contoured surfaces and thermal expansion of substrates thus eliminating moisture ingress for the life of the vehicle.

| Part Number | Stock Type | Dimensions |
|-------------|------------|--|
| BC-1101 | Rope | 3/8" (10 mm) diameter x 35 LF per roll 20 rolls per case (20 lb. gross wt.) 45 CS/PLT |
| BC-1121 | Rope | 1/2" (12 mm) diameter x 27 LF per roll 17 rolls per case (19 lb. gross wt.) 45 CS/PLT |
| BC-1241 | Flat | 3/16"x1/2" (5x12 mm) diameter x 53 LF per roll 20 rolls per case (20 lb. gross wt.) 45 CS/PLT |

* Additional sizes available upon request

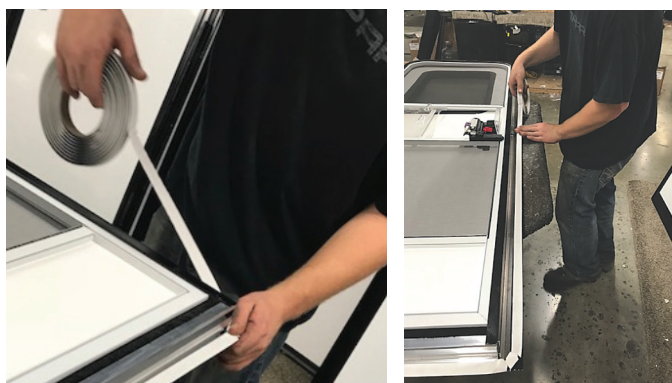

Meets Requirements of:

Ford ESB-M3G143-A2 WSB-M4G341-A

Navistar TMS-6917 TMS-6910

Basic Use

EternaBond® FGT is used as a sealant against moisture and dust elements for various applications including freezer seals, bus body and window, metal building, marine sealing, RV window & floor seals and modular windows.

Health & Safety

Prior to working with this, or any product, consult product label and Safety Data Sheet (SDS) for necessary health and safety precautions.

Storage and Shelf Life

Store material in original unopened container below 32°C (90°F). Shelf life is 1 year minimum when stored as recommended.

| Technical Data | | |
|-----------------------------------|-------------------|-------------|
| Physical Properties | Typical Value | Test Method |
| Density, foam only | 7.0 lbs/cu. Ft. | ASTM D-1667 |
| Hardness: Shore 00 | 60 | ASTM D-2240 |
| * Water Penetration | Pass- No Leaks | AAMA 810.0 |
| * Water Absorption % by volume | 0.20% | NTP-35 |
| Cold Flex @ 20 F | Pass- No Cracking | AAMA 810.0 |
| Tensile Strength | 80 PSI | NPT-7 |
| Elongation | 80% | NPT-7 |
| Burn Rate- Flammability | 1.00 in/min | FMVSS-302 |
| * Tested at 30% compression | | |

| Application Properties | |
|---|------------------------------------|
| Service Temperature | -34° C to 82° C (-30° F to 180° F) |
| Application Temperature | 10° C to 52° C (50° F to 125° F) |
| <p>Note: The foregoing information is published as general information only. The listed properties and performance characteristics are approximate values and are not to be interpreted as manufacturing specifications.</p> | |

As your total solutions provider, our expertise is your advantage.

Contact your sales representative for more details or email transportation@hbfuller.com to request a sample.



SCAN ME

Join the Conversation | www.hbfuller.com/connect

For more information about our company, visit www.hbfuller.com/transportation.

IMPORTANT: The information contained herein is believed to be correct to the best of our knowledge. However the recommendations and suggestions herein are made without guarantee or representation as to results. It is the purchaser's responsibility to test and determine the suitability of the product for the purchaser's intended use and purpose. Purchaser assumes all risk and liability whatsoever regarding such suitability. Any product samples provided for testing are provided in accordance with standard limited warranties as stated on our technical data sheets. © H.B. Fuller Company, 2021.