



Technical Data Sheet

MH-200 Sealant Tape – Premium Waterproofing Sealant Tape

PRODUCT DESCRIPTION

MH-200 is a quality extruded sealant for mobile home, RV and modular home waterproofing. This tape offers superior performance over the conventional putty tapes commonly used for windows, doors, vents, etc. The blend of binders and tackifying resins gives long service life under severe atmospheric conditions. No winter/summer formulation changes are required of this premium sealant.

PRODUCT ADVANTAGES:

MH-200 is ready-to-use in roll form on high quality silicone release paper to assure ease of application to the sealing surface.

- · Greater adhesive strength
- 100% solids to keep its volume
- Superior application time and service range
- Excellent flexibility for movement in buildings
- Withstands extreme temperatures
- Water resistant corrugated carton packaging
- Available in a variety of sizes and widths
- No cracking or crumbling
- Trims cleanly

PRODUCT INSTALLATION


SURFACE PREPARATION: All surfaces to be sealed should be free of dust, dirt, oil, and moisture before applying tape.

WORKING CONDITIONS: Apply in normal dry working conditions above 40°F (4°C).

APPLICATION: Apply directly from roll onto surface to be sealed. Cut to length with scissors or knife. Pressing from paper side, adhere tape firmly onto surface. Gently peel off silicone release paper.

Meets State and Federal Requirements

PRODUCT INSTALLATION DIAGRAM

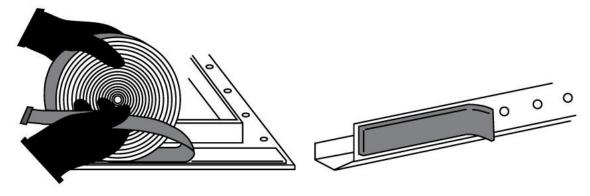





Technical Data Sheet

MH-200 Sealant Tape - Premium Waterproofing Sealant Tape

PRODUCT PROPERTIES AND PERFORMANCE DATA:

DESCRIPTION	AVG	σ	REPLICATES	TEST METHOD
Specific Gravity lb./gal (US)	15.7	0.2	2	ASTM D 792
Low Temperature Flexibility	No loss of adhesion or cracking			ASTM C 765
Weight Loss after Heat Aging	0.35	0.003	2	ASTM C 771
Oil Migration/Plasticizer Bleed-Out	No stain		2	ASTM C 772
Softness mm. penetration	9.4	0.3	5	ASTM C 782
Tensile Adhesive Strength, lb. force	30.1 MOF: Cohesive	2.6	2	ASTM C 907
Yield Strength, lb. force	7.9 psi	0.4	2	ASTM C 908

For more information contact:

CUSTOMER SERVICE

GSSI Sealants (an H.B. Fuller company) 1420 N Post Oak Rd. Houston TX 77055 P: 800-288-9489 | gssisealants.com

