

# NAN YA EPOXY RESIN

Data sheet No:128-1706E

## NPEL-128

### General:

NPEL-128 is a liquid resin, which is manufactured from bisphenol-A and epichlorohydrin. It is recognized as standard form which variations have been developed. Cured NPEL-128 always offers quality and high purity properties in applications, such as maximum mechanical strength, good chemical resistance and excellent heat resistance, etc.


### Chemical Composition:

Diglycidyl ether of Bisphenol-A

### Sale Specification & Typical Properties:

Physical State	Liquid
Epoxy Equivalent Weight (g/eq)	184~190
Color (Gardner)	1.0max
Viscosity(cps , at 25 °C)	12000~15000
Hy-Cl (ppm)	1000 ↓

### Viscosity vs. Temperature Characteristics:

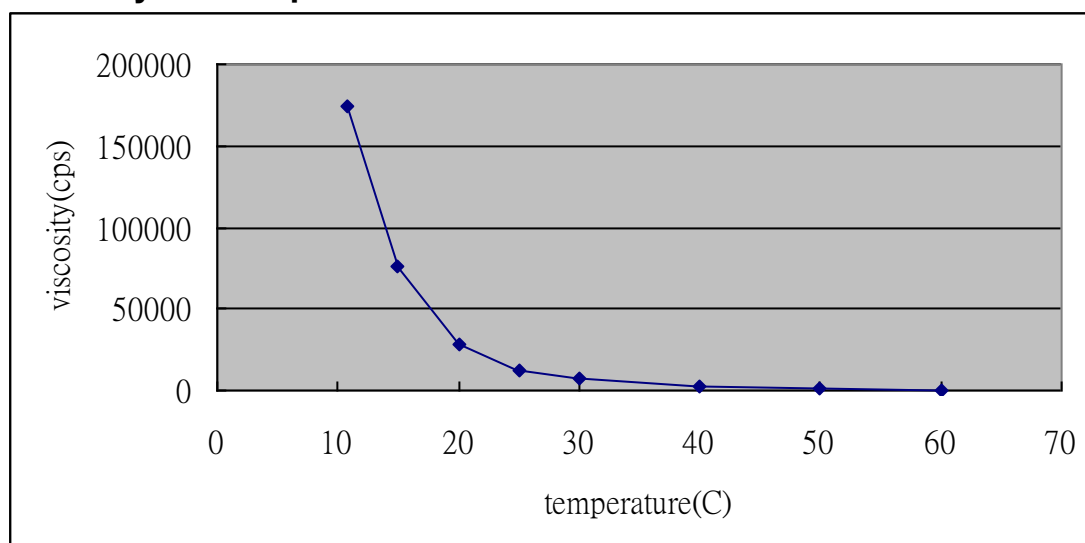

# NAN YA EPOXY RESIN

Data sheet No:128-1706E

## NPEL-128

### Application:

1. Laminates
2. Filament winding
3. Encapsulation
4. Civil engineering
5. Tooling
6. Coatings
7. Adhesives

### Storage properties:

At least 12 months in sealed containers at ambient temperature.

If NPEL-128 develops a haziness or crystallite on storage, This can be dispersed and the resin restored to original condition by warming to 50~60°C, with stirring.

The resin should be stored in a dry place in its original closed packaging.

### Handling precautions:

Product may cause skin and eye irritation. In cases of skin contact wash immediately with soap and water. For eyes, flush with plenty of water for 15 minutes and seek medical attention immediately.