

SEALANT/PRIMER

Millennium Surface Treatment



DESCRIPTION

Millennium Surface Treatment is a spray, brush or roller applied compound developed for use with Millennium brand adhesives and sealants when bonding to difficult substrates such as plastic films, smooth APP modified bitumen membranes, very fresh non-oxidized (glossy surfaced) asphalt or coal tar.

Millennium Surface Treatment is a solvent based product and is not fit for use in VOC regulated markets such as California or the OTC states.

BASIC USE

Millennium Surface Treatment works as an interface between the difficult substrate and the adhesive or sealant to provide an exceptional bond.

For additional information, contact our Technical Department.

SURFACE PREPARATION

All work surfaces should be clean, dry, and free of dirt, dust, debris, oils, loose and/or embedded gravel, un-adhered coatings, deteriorated membrane and other contaminants that may result in a surface that is not sound or is uneven.

EQUIPMENT

Approved application equipment:

- Pressurized garden sprayer
- Brush
- Paint roller

SAFETY

Prior to working with this or any adhesive product consult product label and Safety Data Sheet (SDS) for necessary health and safety precautions.

CAUTION: Use only in well ventilated areas. Keep away from flames or sparks. Do not smoke when applying this product.

LIMITATIONS

- Do not apply to a wet surface, all surfaces must be dry prior to application.
- Do not use with polystyrene or applications that utilize polystyrene as a component within the system.
- This product will produce an odor similar to mineral spirits. Take necessary precautions (cover air intakes) to avoid disruption to building occupants.

FEATURES

One part

Solvent based


Unique formulation

BENEFITS

Easy to apply, no mixing

Dries quickly

Promotes adhesion to fresh asphalt surfaces

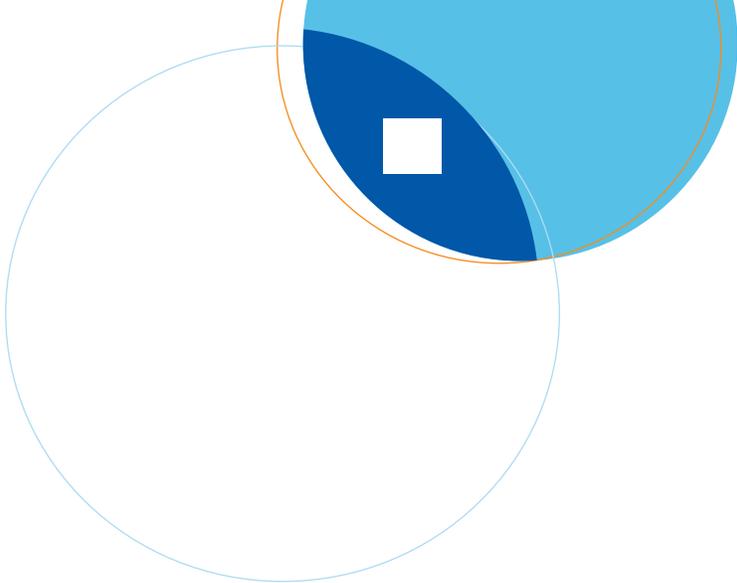

STORAGE

Millennium Surface Treatment can be stored at room temperature where it will have a shelf life of one year. Keep from freezing.

COLOR

Colorless

PACKAGING AND COVERAGE

Millennium Surface Treatment is available in the following package:

<u>Pail Size</u>	<u>Part #</u>	<u>Pails/Pallet</u>
5 Gallon (18.9L)	ST-PR5P-01	36

Covers 400 - 500 sq.ft. (37m² - 46m²) per gallon. Coverage rates may be slightly higher over irregular surfaces.

APPLICATION

1. All work surfaces should be clean, dry, free of dirt, dust, debris, oils, loose un-adhered coatings, deteriorated membrane and other contaminants that may result in a surface that is not sound or may prevent a firm bond.
2. Brush, spray, or roll apply Millennium Surface Treatment over the entire prepared surface.
3. Remove all heavy or puddled areas to ensure proper drying. Allow Millennium Surface Treatment to dry to the touch.
4. Within one hour after Millennium Surface Treatment has been applied, apply Millennium adhesive or sealant in accordance with current product application instructions.
5. Do not apply Millennium Surface Treatment to substrate that will not receive adhesive or sealant within one hour or on the same day.



For more information about our company, visit www.hbfuller.com/construction.

 Join the Conversation | www.hbfuller.com/connect

WARRANTY: H.B. Fuller warrants its products to conform to H.B. Fuller's specifications at the time of sale when tested according to H.B. Fuller standards. If a product is proven to be defective when tested according to H.B. Fuller standards, H.B. Fuller will, at its option, refund the purchase price or replace or repair the defective product. THIS LIMITED WARRANTY IS THE BUYER'S SOLE AND EXCLUSIVE REMEDY AGAINST H.B. FULLER AND IS IN LIEU OF ANY AND ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. In no event shall H.B. Fuller be liable for any special, incidental, consequential, or punitive damages arising out of any claims whether based on negligence, contract, warranty, strict liability or otherwise.